

FLEXIBLE SEDIMENT BARRIER SPACING TABLE

SLOPE OF ROADWAY (PERCENT)	0 TO 0.9	1 TO 1.9	2 TO 2.9	3 TO 4	5+
INTERVAL BETWEEN BARRIERS	50'	35'	30'	25'	20'
ANGLE FROM FACE OF CURB	70°	70°	70°	45°	45°
SUGGESTED BARRIER LENGTH	6'	6'	6'	6'	6'

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

Robert B. Smith
LICENSED LANDSCAPE ARCHITECT

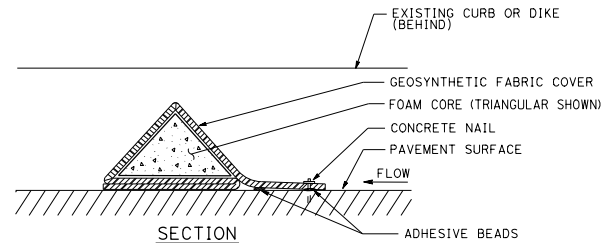
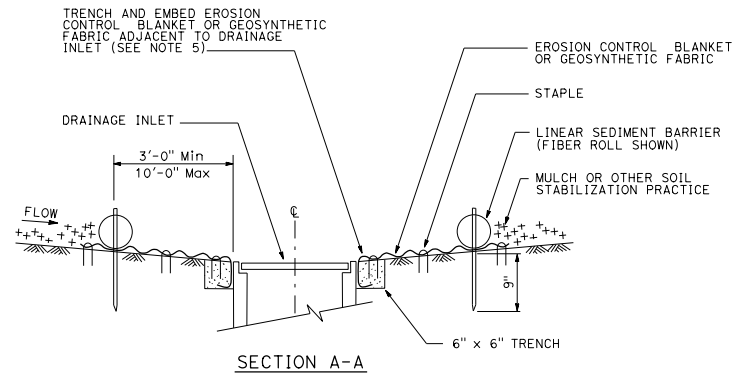
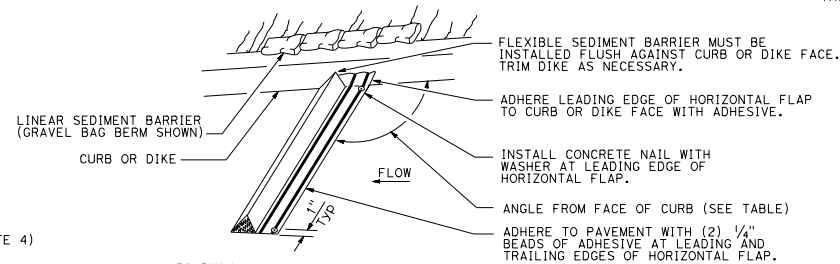
May 31, 2018
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS
OR AGENTS SHALL NOT BE RESPONSIBLE FOR
THE ACCURACY OR COMPLETENESS OF SCANNED
COPIES OF THIS PLAN SHEET.

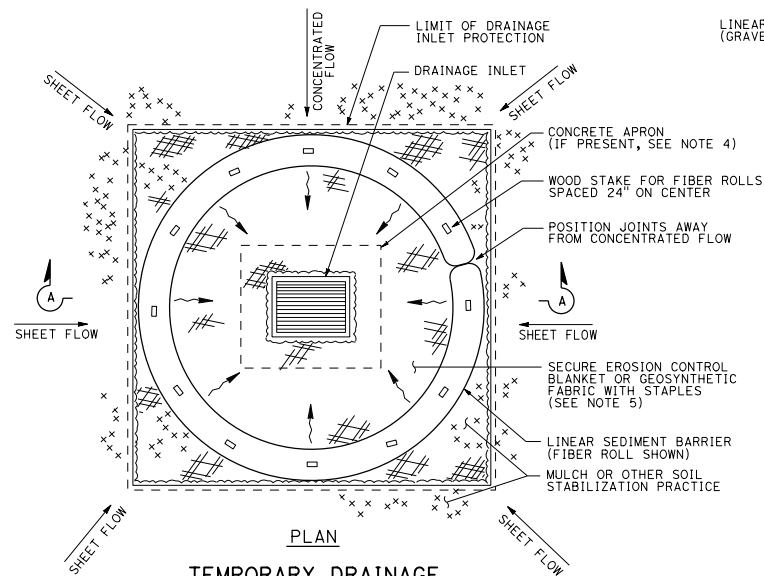
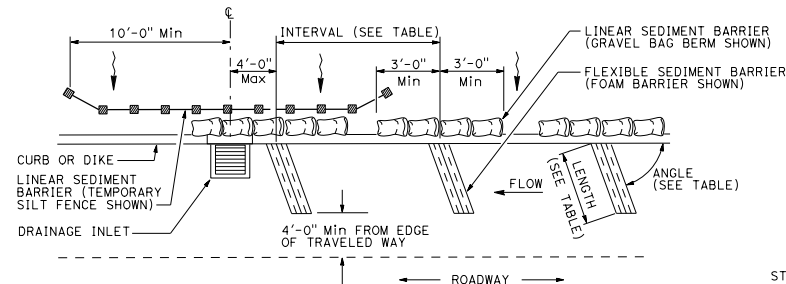

11-30-18
Robert B. Smith
11-30-18
STATE OF CALIFORNIA

NOTES:

- See Standard Plan T51 for Temporary Silt Fence.
- Dimensions may vary to fit field conditions.
- Install a minimum of 3 flexible sediment barriers upstream of each drainage inlet to be protected.
- Position erosion control blanket or geosynthetic fabric at edge of concrete apron and secure in trench.
- Erosion control blanket or geosynthetic fabric is not required if the area adjacent to the drainage inlet is vegetated.

FLEXIBLE SEDIMENT BARRIER DETAIL
(FOAM BARRIER SHOWN)

PERSPECTIVE

TEMPORARY DRAINAGE
INLET PROTECTION (TYPE 4A)TEMPORARY DRAINAGE
INLET PROTECTION (TYPE 4B)
FLEXIBLE SEDIMENT BARRIER

STAPLE DETAIL

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATIONTEMPORARY WATER POLLUTION
CONTROL DETAILS
(TEMPORARY DRAINAGE
INLET PROTECTION)

NO SCALE

T63